

DUROFOAM

background filling profile

DUROFOAM is a closed cell polyethylene profile, which can be used to fill deep working or saw cut joints of industrial concrete floors.

DUROFOAM is a support or **DUROFLEX** joint filler.

ADVANTAGES

- Helps to optimize the use of filler material
- Helps elastic movement of filler material
- Ensures optimising the height and width of joint gaps

TECHICAL DATA

- Easy to use
- Soft and elastic
- Close cell structure, not absorbent
- Tolerates changes in temperature
- Available with different diameters
- Grey coloured

INSTRUCTION FOR USE


It is very easy to install it, does not require any special tools. Pay attention so that the surface of **DUROFOAM** will be free from deflection. The appropriate diameter is 20-25% more than the width of the gap to be filled.

STORAGE

To be store in dry conditions.
Shelf life: unlimited

RANGE OF PRODUCT

TYPE	DIAMETER	OUTFIT
DUROFOAM 6	6 mm	500 m
DUROFOAM 10	10 mm	600 m
DUROFOAM 15	15 mm	250 m
DUROFOAM 20	20 mm	150 m

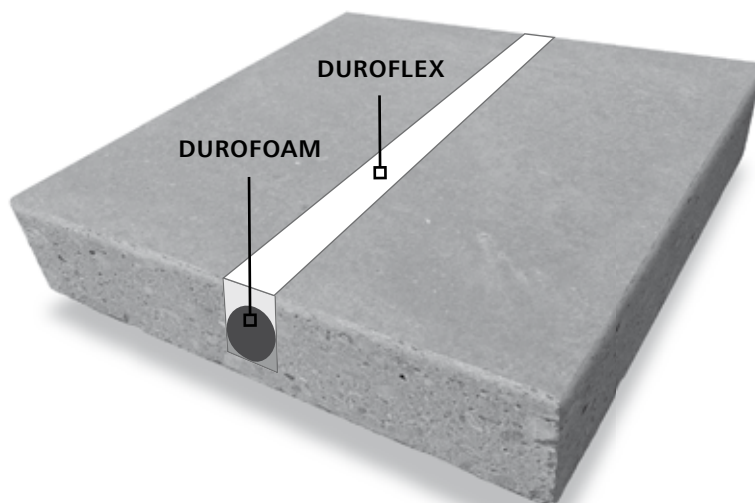

DECLARATION OF PERFORMANCE

EN-CPR- FU11-12-13-14/2016

1. Unique identification code (name) of the product-type:

Durofoam

2. Type, batch or serial number or any other element allowing identification of the construction product:

Not relevant

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:

Closed cell polyethylene profile for filling joints of industrial floors.

4. Name, registered trade name or registered trade mark and contact address of the manufacturer:

Durostone Kft. – 2038 Sóskút, Ipari park 3508/23 hrsz., Hungary

5. Where applicable, name and contact address of the authorised representative:

Not relevant

6. System or systems of assessment and verification of constancy of performance of the construction product:

System 4

7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:

Not relevant

The manufacturer has made the examination of the product, the production process and executes continuous surveillance, assessment and approval of factory production control.

8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

Not relevant

9. Declared performance

Essential Characteristics	Performance	Harmonised technical specification
Reaction to fire	NPD	-
Resistance to fire	NPD	-
Emission of dangerous substances	NPD	-

• NPD Nincs meghatározott teljesítmény (No Performance Determined)

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:


Ákos Révai managing director

Place and date of issue: Sóskút, 15.01.2016

info@durostone.hu
www.durostone.hu